

Tube Current Transformer CTM 7

Name	I _{prim.} [A]	I _{sec.} [A]	P [VA]	class
CTM 7 32/1A 0,2VA Kl.1	32	1	0.2	1
CTM 7 35/1A 0,2VA Kl.1	35	1	0.2	1
CTM 7 40/1A 0,3VA Kl.1	40	1	0.3	1
CTM 7 50/1A 0,4VA Kl.1	50	1	0.4	1
CTM 7 60/1A 0,4VA Kl.1	60	1	0.4	1
CTM 7 64/1A 0,5VA Kl.1	64	1	0.5	1



Electrical attributes:

Primary current:	32 - 64 A
Secondary current:	1 A
Burden:	0.2 - 0.5 VA
Accuracy class:	1

Dimensions:

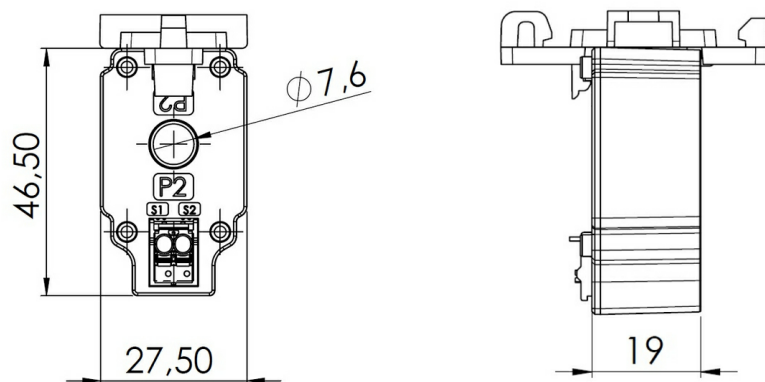
Round conductor:	7.6 mm
Width:	27.5 mm
Height:	46.5 mm
Depth:	19 mm

Technical details:

Therm. nominal continuous current I_{cth} : $1.0 \times I_N$
Therm. nominal short-time current I_{th} : $60 \times I_N$, 1 sec.
Max. operating voltage U_m : 0.72 kV
Insulation test voltage: 3 kV, U_{eff} , 50 Hz, 1 min.
Nominal rated frequency: 50 Hz
Insulation class: E

Further information:

Over-current limiting factor:	see rating label
Operating temperature range:	$-5^{\circ}\text{C} < T < +50^{\circ}\text{C}$
Storage temperature range:	$-25^{\circ}\text{C} < T < +70^{\circ}\text{C}$
Unbreakable plastic housing made of grey polyamide:	flame resistant
Package quantity:	1 piece
Customs tariff number:	85043129

Dimensions:**Contact:**

AMS GmbH
Enge Gasse 1
D-91275 Auerbach

Phone: +49 9643 9205-0
Fax: +49 9643 9205-90
info@ams-messtechnik.de